

Your partner:

Enquiry     Order

Reference no. (Customer):

<b>Customer no.:</b>	<input type="text"/>	<b>Order address:</b>	<input type="text"/>
Customer:	<input type="text"/>		<input type="text"/>
Contact person:	<input type="text"/>	<b>Delivery address:</b>	<input type="text"/>
Telephone:	<input type="text"/>		<input type="text"/>
E-mail:	<input type="text"/>	<b>Requested delivery date:</b>	<input type="text"/>

## Edscha SB-Profi Roof

### Basic roof\*



**Basic roof SB-Profi Standard**  
(see page 11)

**Basic roof SB-Profi Volume**  
with additional folding brackets (see page 12)  
*Suitable for optimised loading height*

*Quantity of roofs with identical parameters*


**Piece**    **Roof length (V):**  m

\* Scope of delivery as described in the brochure under "Basic roof"

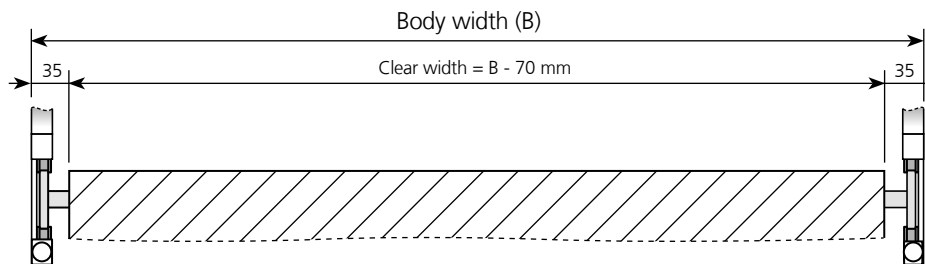

**Body width (B)\*:**  mm

\* Indications from 2250 - 3000 mm in 50 mm steps possible.  
(Clear width: 2280 - 2630 mm)

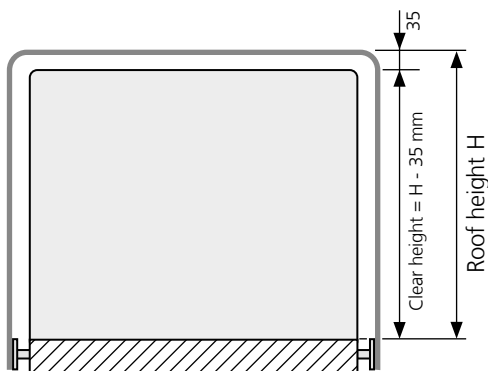


**Roof height (H)\*:**  mm

\* Indications from 2250 - 3000 mm in 50 mm steps possible.  
(Clear height: 2215 - 2965 mm)

Made from standard parts by customer incl. adaptation of bulkhead lock


**Define distance to the *tensioning* tube**

Side tensioning tube



x =  mm

Tensioning tube at the front



(x = x1 + x2) =  mm

**Optionally available, alternative color for side tarpaulin** (not bright grey / RAL 7035)

Side tarpaulin left – please enter color number, Color:  Color 01 to Color 48 possible, see page 14

Side tarpaulin right – please enter color number, Color:  Color 01 to Color 48 possible, see page 14

**Options**

**Digital print on both sides and rear**

Number of attachments:

**Side tarpaulin left**

File name (incl. suffix): \_\_\_\_\_

*Also use the same file for the side tarpaulin on the right*

**Side tarpaulin right**

File name (incl. suffix): \_\_\_\_\_

**Rear Tarpaulin**

File name (incl. suffix): \_\_\_\_\_

**End carriage 581 mm long incl. locking on both sides \***

(< 20 km/h; including rear tarpaulin on both sides)

**Front carriage 261 mm long on both sides \***

(only suitable for short bodies, requires front frame on both sides)

**Conventional lettering on side tarpaulins**

left side     right side

**Conventional lettering rear**

File formats bitmaps:

- TIFF file (without compression)
- JPG file (without compression)
- EPS file

File formats layout data:

- Adobe Illustrator
- Adobe InDesign
- CorelDraw (up to version 21 - 2019)
- PDF (PDF/X-4)

\* The required number of bows may vary depending on the configuration

**Optional accessories**

**Sealing tape between rails & chassis, 5 m roll**

**Softdoor kit with sling lock for roofs without tarpaulin**